


Totally Carpet Specs

Style Name	Strident
Style Number	1033
Pattern Repeat	9.6W" X 38.5" L
Tufted Yarn Weight	46 oz
Gauge	1/10
Construction	Tip Sheared
Face Yarn	100% Solution Dyed Nylon
Yarn Spec	"Cortex" (Patent Pending) Twisted & Heatset For High Performance
Tufts/sq in.	220 (Gauge x Stitch Rate x Tufts/Stitch)
Pile Height	0.187
Primary Backing	4 oz Woven Polypropylene
Secondary Backing	High Performance Backing System with 18x5 Lino ActionBac
Tile Backing	Vinyl composite with recycled content
Width Broadloom	12'
Tile Size	24" x 24"
Treatments	Commercial carpet soil protection & static control
Post Installation Protection	Plastic protection is prohibited. It causes discoloration and accelerated soiling. Craft paper, corrugated box material or masonite are recommended.
Recommended Adhesive Broadloom	Totally Premium Broadloom Adhesive
Recommended Adhesive Tile	Totally Premium Tile Adhesive
Flammability	Passes Class 1 (ASTM E-648)
Electrostatic Propensity	Passes AATCC - 134 @ 3.5 KV or less
Dye Lot Size	Unlimited
Custom Colors & Weight	Please Inquire
Origin	Made in USA
LEED	Contributes to Leed Credits
CRI	Green Label Plus
Warranty	Tile: limited lifetime warranty. Broadloom: 10 year limited warranty


Totally Carpet Specs

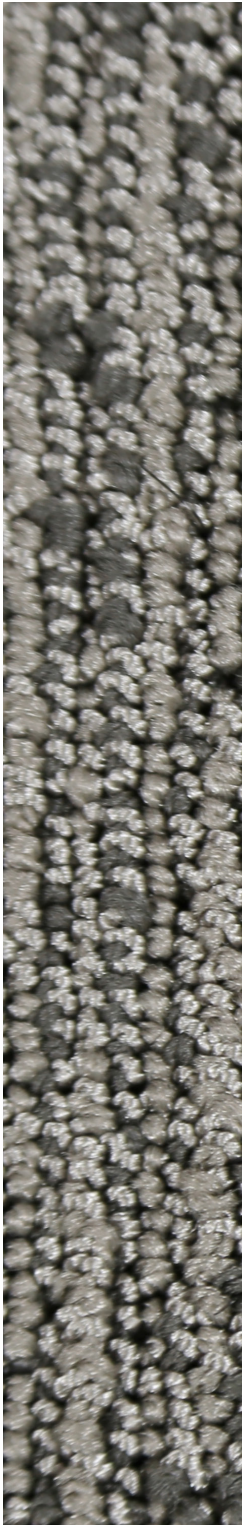

Style Name	Strident Loop
Style Number	1034
Pattern Repeat	9.6W" X 38.5" L
Tufted Yarn Weight	46 oz
Gauge	1/10
Construction	Loop
Face Yarn	100% Solution Dyed Nylon
Yarn Spec	"Cortex" (Patent Pending) Twisted & Heatset For High Performance
Tufts/sq in.	220 (Gauge x Stitch Rate x Tufts/Stitch)
Pile Height	0.218
Primary Backing	4 oz Woven Polypropylene
Secondary Backing	High Performance Backing System with 18x5 Lino ActionBac
Width Broadloom	12'
Treatments	Commercial carpet soil protection & static control
Post Installation Protection	Plastic protection is prohibited. It causes discoloration and accelerated soiling. Craft paper, corrugated box material or masonite are recommended.
Recommended Adhesive Broadloom	Totally Premium Broadloom Adhesive
Flammability	Passes Class 1 (ASTM E-648)
Electrostatic Propensity	Passes AATCC - 134 @ 3.5 KV or less
Dye Lot Size	Unlimited
Custom Colors & Weight	Please Inquire
Origin	Made in USA
LEED	Contributes to Leed Credits
CRI	Green Label Plus
Warranty	Broadloom: 10 year limited warranty

Totally Carpet Specs

Style Name	Multi-Strident
Style Number	1013
Pattern Repeat	9.6W" X 38.5" L
Tufted Yarn Weight	46 oz
Gauge	1/10
Construction	Tip Sheared
Face Yarn	100% Solution Dyed Nylon
Yarn Spec	"Cortex" (Patent Pending) Twisted & Heatset For High Performance
Tufts/sq in.	220 (Gauge x Stitch Rate x Tufts/Stitch)
Pile Height	0.187
Primary Backing	4 oz Woven Polypropylene
Secondary Backing	High Performance Backing System with 18x5 Lino ActionBac
Tile Backing	Vinyl composite with recycled content
Width Broadloom	12'
Tile Size	24" x 24"
Treatments	Commercial carpet soil protection & static control
Post Installation Protection	Plastic protection is prohibited. It causes discoloration and accelerated soiling. Craft paper, corrugated box material or masonite are recommended.
Recommended Adhesive Broadloom	Totally Premium Broadloom Adhesive
Recommended Adhesive Tile	Totally Premium Tile Adhesive
Flammability	Passes Class 1 (ASTM E-648)
Electrostatic Propensity	Passes AATCC - 134 @ 3.5 KV or less
Dye Lot Size	Unlimited
Custom Colors & Weight	Please Inquire
Origin	Made in USA
LEED	Contributes to Leed Credits
CRI	Green Label Plus
Warranty	Tile: limited lifetime warranty. Broadloom: 10 year limited warranty

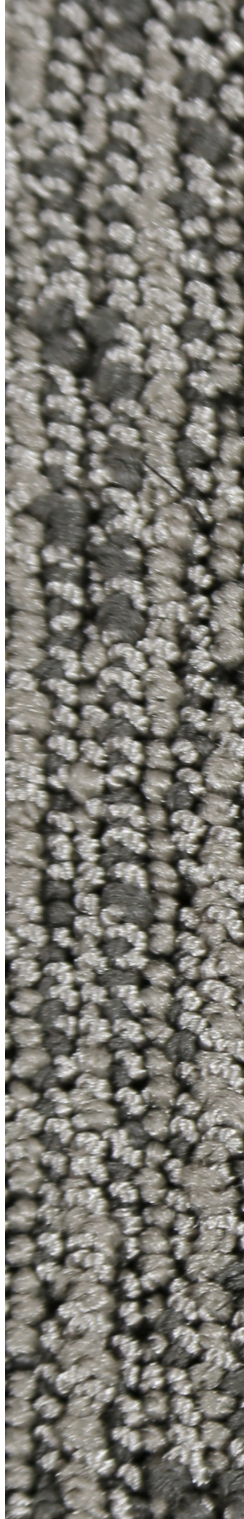

Totally Carpet Specs

Style Name	Multi-Strident Loop
Style Number	1012
Pattern Repeat	9.6W" X 38.5" L
Tufted Yarn Weight	46 oz
Gauge	1/10
Construction	Loop
Face Yarn	100% Solution Dyed Nylon
Yarn Spec	"Cortex" (Patent Pending) Twisted & Heatset For High Performance
Tufts/sq in.	220 (Gauge x Stitch Rate x Tufts/Stitch)
Pile Height	0.218
Primary Backing	4 oz Woven Polypropylene
Secondary Backing	High Performance Backing System with 18x5 Lino ActionBac
Width Broadloom	12'
Treatments	Commercial carpet soil protection & static control
Post Installation Protection	Plastic protection is prohibited. It causes discoloration and accelerated soiling. Craft paper, corrugated box material or masonite are recommended.
Recommended Adhesive Broadloom	Totally Premium Broadloom Adhesive
Flammability	Passes Class 1 (ASTM E-648)
Electrostatic Propensity	Passes AATCC - 134 @ 3.5 KV or less
Dye Lot Size	Unlimited
Custom Colors & Weight	Please Inquire
Origin	Made in USA
LEED	Contributes to Leed Credits
CRI	Green Label Plus
Warranty	Broadloom: 10 year limited warranty