
OTALLY

ENTERPRISES, LLC

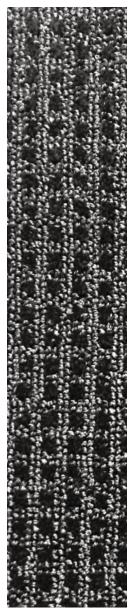

Totally Carpet Specs

Style Name Style Number Pattern Repeat **Tufted Yarn Weight** Gauge Construction Face Yarn Yarn Spec For High Performance. Tufts per Sq. Inch Pile Height **Primary Backing** Secondary Backing

Width Broadloom

Post Installation Protection

Treatments Broadloom Adhesive

Flammability

Dye Lot Size

Origin

LEED

Warranty

CRI



1002 0.4" w x 0.4" h 48 oz 1/10 Tip Sheared Enhanced Loop 100 % Solution Dyed Nylon "Cortex" (Patent Pending) Twisted & Heatset 214 (Gauge x Stitch Rate x Tufts/Stitch) 0.2 4 oz Woven Polypropylene High Performance Backing System with 18x5 Lino ActionBac 12' Plastic protection is prohibited. It causes discoloration and accelerated soiling. Craft paper, corrugated box material or masonite are recommended. Commercial carpet soil protection & static control **Totally Premium Broadloom Adhesive** Passes Class 1 (ASTM E-648) **Electrostatic Propensity** Passes AATCC - 134 @ 3.5 KV or less Unlimited Custom Colors & Weight **Please Inquire** Made in USA **Contributes to Leed Credits Green Label Plus**

Regimen

Broadloom: 10 year limited warranty

Totally Enterprises, LLC

404 Mitchell Street, Dalton, GA 30721 | 888-882-1500 | www.totallycarpet.com